

# TREMstop MP

## Firestopping Putty Pads

### PRODUCT DESCRIPTION:

TREMstop MP is a moldable putty available in easy-to-use pad form for electrical outlet boxes. TREMstop MP exhibits great adhesion and remains pliable allowing for easy retrofit. The TREMstop MP putty pad is specially designed for use with metal and plastic electrical outlet boxes. TREMstop MP has been tested in accordance with UL 263 at Underwriters Laboratories, Inc., and is classified as a Wall Opening Protective Material. TREMstop MP is applied by hand allowing for quick installation. TREMstop MP also significantly reduces sound transmission through wall assemblies.

TREMstop MP allows for one side of the release paper to remain on the putty pad reducing the amount of product build-up on your hands.

### ADVANTAGES:

- Remains highly pliable permitting easy retrofits
- Excellent adhesive strength
- Specially designed for use with metal and plastic electrical outlet boxes
- Application by hand makes installation fast and easy
- Hands can be cleaned with soap and water
- Reduces sound transmission through wall assemblies
- CLIV listed
- Listed up to a 2 hour fire rating

### BASIC USES:

- Max. 14-1/4 in. x 4-1/2 in. UL listed Metal Electrical Outlet Box
- Max. 4 in. x 3-3/4 in. UL listed Carlon Plastic Electrical Outlet Box

### Building Assemblies

- Gypsum wallboard

### PHYSICAL PROPERTIES:

**Color:** Rust red

**Odor:** Mild

### STC Information:

**(ASTM E-90)** Evaluated to restore the STC Ratings of construction assemblies with STC Ratings up to 65

### PACKAGING:

6 in. x 7 in. x .2 in.  
(152 mm x 178 mm x 51 mm)  
12 pads/cs

7.25 in. x 7.25 in. x .2 in.  
(184 mm x 184 mm x 51 mm)  
12 pads/cs

9.25 in. x 9.25 in. x .2 in.  
(235 mm x 235 mm x 51 mm)  
12 pads/cs

# TREMstop MP

## Firestopping Putty Pads

### LIMITATIONS:

- Not recommended for use with passive fire containment systems not listed or approved by Tremco.
- Not recommended for exterior applications.

### INSTALLATION TECHNIQUES:

Refer to the Tremco Firestopping Products and Systems Guide for firestop systems.

Remove the release liner from one side of the pad. Align pad to the side of the box, overlapping the stud. Cut slits in pad to fit around conduit or cables.

Adhere the TREMstop MP to the back of the electrical outlet box. Reshape the pad to fit around the box. Trim excess corners and mold to the inside of the conduit fittings connected to the box. Remove the exposed release liner, if desired.

To restore STC ratings, install in accordance with ASTM C-919 or similar standard.

### APPLICABLE TEST STANDARDS:

UL 263

### WARRANTY:

Tremco warrants its Firestop Materials to be free of defects, but makes no warranty as to appearance or color. Since methods of application and on-site conditions are beyond our control and can affect performance, Tremco makes no other warranty, expressed or implied, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE with respect to Firestop Materials. Tremco's sole obligation shall be, at its option, to replace or to refund the purchase price of the quantity of the Firestop Materials proved to be defective and Tremco shall not be liable for any loss or damage.

### TECHNICAL SERVICES

For more information, contact technical services:


Toll free: (866) 209-2404  
Fax: (216) 514-7575  
E-mail: FireTech@tremcoinc.com

### ORDER PLACEMENT:

To place an order, contact customer service:

United States: (800) 321-7906  
Canada: (800) 363-3213

### STC INFORMATION

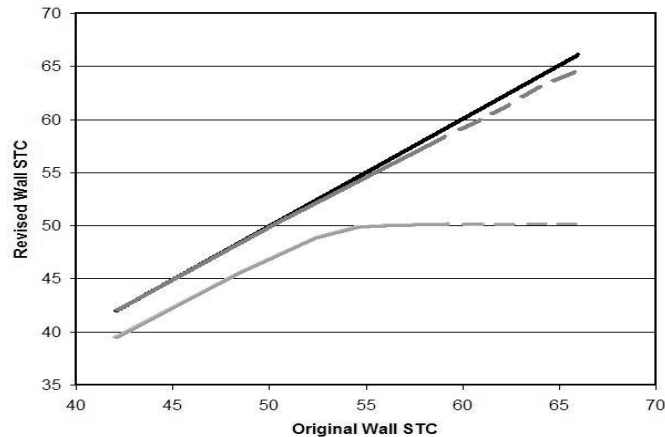

### LEGEND

- Original Wall STC
- Wall STC with unprotected outlet boxes\*
- Wall STC with outlet boxes protected with TREMstop Putty Pads\*

Note: Dashed line represents an extrapolation of data.\*\*

THE TREMCO FAMILY OF PRODUCTS IS RECOGNIZED BY



**Tremco Incorporated** • 3735 Green Road • Beachwood, Ohio 44122 USA  
Phone: (216) 292-5000 • Fax: (216) 514-7575 • Toll Free: (866) 209-2404

**Tremco Canada Division** • 215 Wicksteed Ave. • Toronto, Ontario M4H 1G7 Canada  
Phone: (416) 467-2455 • Fax: (800) 361-3514 • Toll Free: (800) 363-3213

For MSDS or additional Spec Data Sheets, contact customer service at (800) 321-7906 or visit [www.tremcofirestop.com](http://www.tremcofirestop.com)

# TREMCO